

Dearborn Transport Lock – with Dimensions

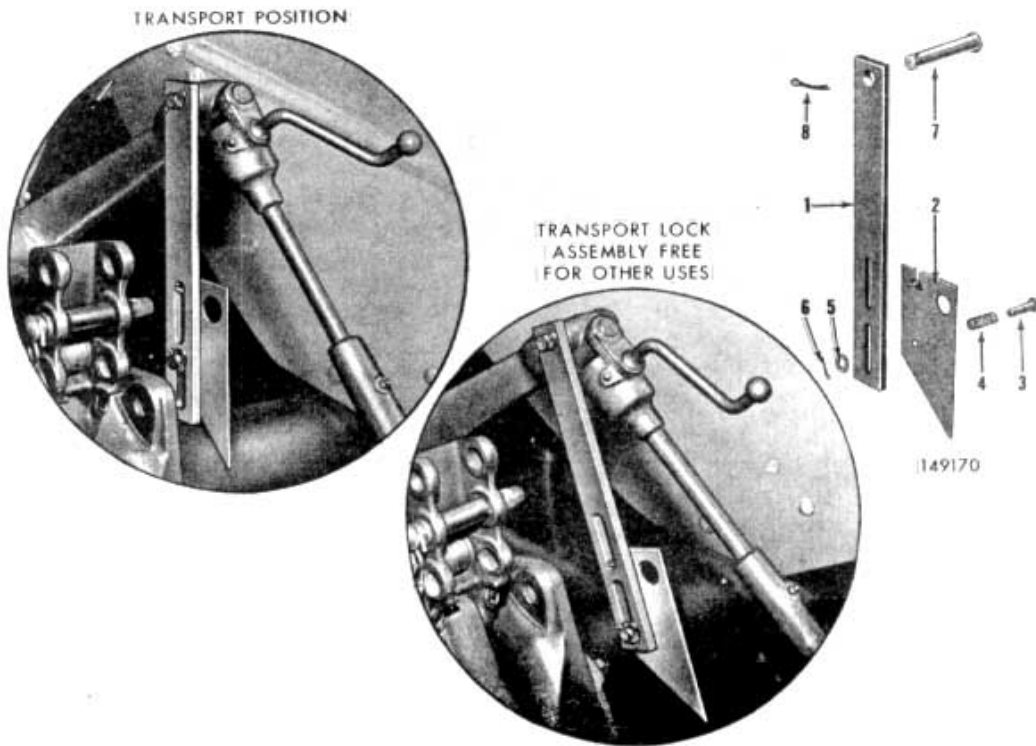


Figure 10- Transport Lock Assembly





Long bar at bottom of picture – 13.5" long, 1.5" wide, and 5/16" thick

- Slots on left end of long bar – 2-3/8" long, 7/16" wide, leftmost slot is 1/2" from end of bar, slots are 1/2" apart
- Hole on right end of long bar – 5/8" Inner Diameter, right edge is 5/16" from right end of bar

Trapezoidal component at top of picture – bottom edge is 7", top edge is 4", right end is 3", and left/diagonal end is 4-1/8", 1/8" thick.

- Large hole in lower, right corner – 1" inner diameter, 1/4" from bottom edge, 9/16" from right end
- Small hole in upper, left corner – 7/16" inner diameter, 1-1/8" from leftmost edge, 1/2" from top
- Tab on upper, right side of component – tab is 3/8" wide; top of gap is 9/16" from top edge, bottom of gap is 2" from bottom edge

Long pin (used to attach Transport Lock to leveling box assembly knuckle) – 5" x 5/8", cotter pin hole is 1/8" inner diameter

Short pin (used to attach long bar and trapezoidal component) – 1-9/16" x 3/8", cotter pin hole is 1/8" inner diameter

Spring (to provide tension between two components) – 1-1/2" x 1/2"

Flat Washer – 3/8"



*Best internet source
of information and help
for old Ford tractors.*

www.ntractorclub.com