

WARNING!

SERVICE DAILY

VERY DUSTY CONDITIONS-TWICE DAILY

USE S.A.E. 30 OIL - ABOVE 40° F.

USE S.A.E. 10W OIL - BELOW 40° F.

AIR INLET SCREEN MUST BE KEPT
CLEAN AND FREE FROM OIL.
CLEAN FILTER ELEMENT AND BODY
MONTHLY WITH SOLVENT.
KEEP HOSE CONNECTIONS TIGHT.
USE OF ADDITIONAL CLEANERS
NOT RECOMMENDED.



**BE
CAREFUL**

PULL ONLY
FROM STANDARD
DRAWBAR OR
DRAWBAR CLEVIS
DO NOT HITCH
TO AXLE OR ANY
POINT ABOVE

WARNING!

USE FORD MOTOR CO.

VENTED CAP

PART NO. NAA-9030-D

ONLY

ON THIS FUEL TANK



BE CAREFUL

PULL ONLY FROM STANDARD
DRAWBAR OR DRAWBAR CLEVIS
DO NOT HITCH TO AXLE OR
ANY POINT ABOVE

BE CAREFUL

**PULL ONLY FROM STANDARD
DRAWBAR OR DRAWBAR CLEVIS
DO NOT HITCH TO AXLE OR
ANY POINT ABOVE**

BE CAREFUL

KEEP ALL SAFETY SHIELDS IN PLACE.

**DISENGAGE PTO AND SHUT OFF ENGINE BEFORE SERVICING
TRACTOR OR PTO DRIVEN IMPLEMENTS.**

**KEEP HANDS, FEET AND CLOTHING AWAY FROM ALL MOVING
PARTS.**

**DO NOT PERMIT ANYONE TO RIDE ON TRACTOR OR IMPLEMENT
EXCEPT THOSE REQUIRED FOR ITS OPERATION.**

**ALWAYS USE PROPER WARNING DEVICES FOR HIGHWAY
OPERATION.**

TRACTOR OPERATION AND MAINTENANCE

**REFER TO OWNERS MANUAL FOR COMPLETE OPERATION AND
MAINTENANCE INSTRUCTIONS.**

MADE IN U S A

Ford

REG US PAT OFFICE
MARCA REGISTRADA

All 801 Series except Select-O-Speed Models

For Non-Commercial Use by Ntractorclub.com Members Only

www.ntractorclub.com


★
WATCH YOUR PROOF-METER

- EVERY 10 Hours** Lubricate All Fittings. Check Air Cleaner. Check Engine Oil.
- EVERY 100 Hours** Change Engine Oil. Check Oil Level in Steering Housing, Hydraulic System, Transmission, and Rear Axle.
- EVERY 200 Hours** Change Oil Filter. Oil Rear Generator Bearing. Lubricate Distributor Cam.
- EVERY 600 Hours OR MORE OFTEN** Repack Front Wheel Bearings High Grade Short Fibre Grease. Remove and Clean Air Cleaner Assembly. Change Oil in Transmission, Rear Axle and Hydraulic System.

FOLLOW SEASONAL REQUIREMENTS BELOW:

Engine Oil	WINTER (Below 32° F.) SAE10W or 20W	SUMMER (Above 32° F.) SAE 20 or 30
Hydraulic System .	(Below 10° F.) Mix 7 Qts. M-4864-A with 2 Qts. M-4864-D	(Above 10° F.) M-4864-A 9 Qts.
Transmission and Rear Axle	Use Mild Extreme Pressure Lubricant SAE 80 Both Summer and Winter	

**CALL YOUR FORD TRACTOR DEALER FOR SERVICE
 USE ONLY GENUINE FORD TRACTOR PARTS . . .**

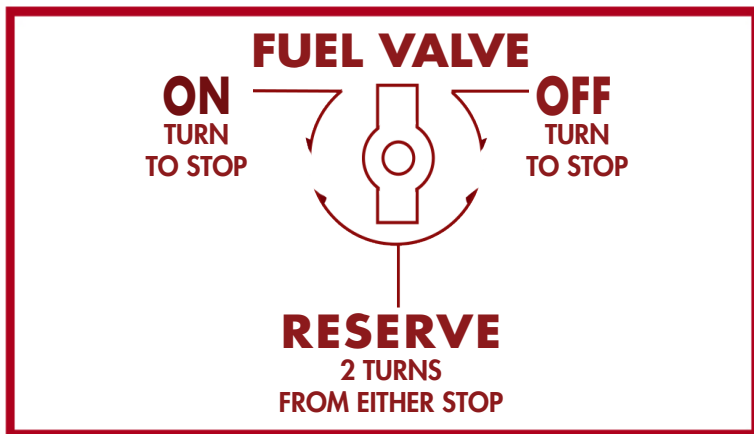

**FOR STANDARD
SETTING ADJUST
SLEEVE TO
GROOVES AS
SHOWN**

**MODEL
601 & 801
MODEL
701 & 901**

**THIS TRACTOR
IS CONSTRUCTED UNDER
UNITED STATES
LETTERS PATENT**

1,871,545	2,092,283
1,873,569	2,191,917
1,908,798	2,201,405
1,963,657	2,279,671
1,975,837	2,326,113
2,035,392	2,365,925
2,035,393	2,365,926
2,035,394	

OTHER PATENTS PENDING

MADE IN U.S.A. BY

REG U.S. PAT.OFF.

Used with 600 & 800 Series

**POSITION
CONTROL**

DRAFT CONTROL

**BATTERY
FILL WITH CLEAN
WATER EVERY 3 DAYS**

Used with N & 600 & 800 Series

WARNING!

**TO SAVE FUEL, SERVICE
PRECLEANER DAILY. DO NOT OIL.**

**CLEAN BOTTOM SCREEN AND
CENTER AIR TUBE.**

KEEP HOSE CONNECTIONS TIGHT.

Used with N & 600 & 800 Series

★ WATCH YOUR PROOF-METER

- EVERY**
10 Hours Lubricate All Fittings. Check Air Cleaner.
Check Engine Oil.
- EVERY**
100 Hours Change Engine Oil. Check Oil Level in Steering
Housing, Hydraulic System, Transmission and Rear Axle
Pedestal and Both Right and Left Final Drives.
- EVERY**
200 Hours Change Oil Filter. Oil Rear Generator Bearing.
Lubricate Distributor Cam.
- EVERY**
600 Hours Repack Front Wheel Bearings High Grade Short Fibre
Grease. Remove and Clean Air Cleaner Assembly.
OR MORE
OFTEN Change Oil in Transmission, Rear Axle and Hydraulic
System and Both Right and Left Final Drives.

FOLLOW SEASONAL REQUIREMENTS BELOW:

Engine Oil	WINTER (Below 32° F.) SAE10W or 20W	SUMMER (Above 32° F.) SAE 20 or 30
Hydraulic System .	(Below 10° F.) Mix 2 Parts M-4864-A with 1 Part M-4864-D	(Above 10° F.) M-4864-A 9 Qts.
Transmission, Rear Axle Pedestal and Both Final Drives	Use Ford Tractor Hydraulic Oil M-4864-A Winter and Summer	

BATTERY CHECK AND FILL WITH CLEAN WATER WEEKLY

WARNING!

SERVICE AIR CLEANER DAILY
 VERY DUSTY CONDITIONS TWICE DAILY
 USE S. A. E. 30 OIL ABOVE 40° F
 USE S. A. E. 10W OIL BELOW 40° F
 AIR INLET SCREEN MUST BE KEPT
 CLEAN AND FREE FROM OIL
 CLEAN BOTTOM FILTER AND
 CENTER TUBE MONTHLY
 KEEP HOSE CONNECTIONS TIGHT
 USE OF ADDITIONAL CLEANERS
 NOT RECOMMENDED

THIS TRACTOR IS CONSTRUCTED
 UNDER ONE OF MORE OF THE
 FOLLOWING UNITED STATES

LETTERS PATENTS

2,468,809	2,563,277
2,488,469	2,674,237
2,507,000	2,631,514
2,540,458	2,631,515

Other Patents Pending
 MADE IN U. S. A.



REG. U. S. PAT. OFF.

**CALL YOUR FORD TRACTOR DEALER
 FOR SERVICE USE ONLY
 GENUINE FORD TRACTOR PARTS**



601 & 801 (gas) Series Proofmeter

For Non-Commercial Use by Ntractorclub.com Members Only

www.ntractorclub.com

DEARBORN



For Non-Commercial Use by Ntractorclub.com Members Only

www.ntractorclub.com