

Liquid may be introduced into the tubes by one of the three following methods:

1. Gravity; attaching hose adapter to valve and from a level at least five feet higher than valve stem, allowing liquid to run into tube. See Fig. 37.

2. Hand Force Pump; taking liquid from open container and forcing through the hose and valve adapter into the tube. See Fig. 38.

3. Pressure Tank; fill a closed container with liquid, which will withstand air pressure of 100 or more pounds, and attach air hose to inlet on container to force liquid into the tube. See Fig. 39.

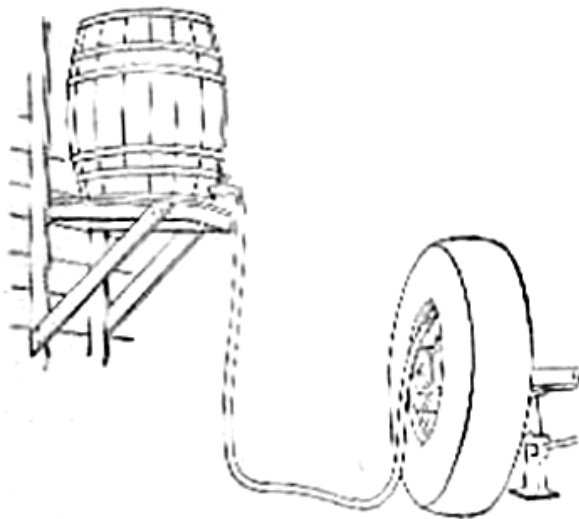


Fig. 37.

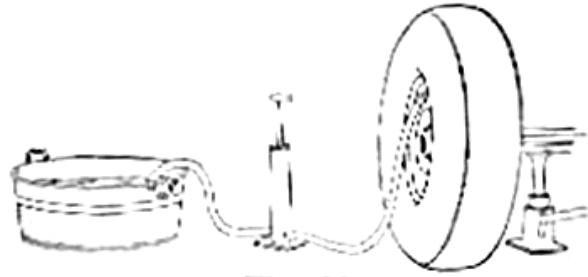


Fig. 38.

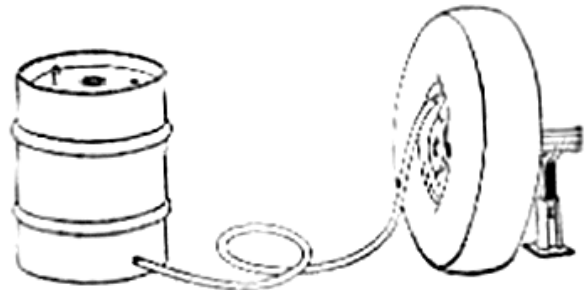


Fig. 39.

AMOUNT OF WATER AND SOLUTION FOR VARIOUS SIZE TIRES

TIRE SIZE	PART I.		PART II.			PART III.		
	WATER ONLY		CALCIUM CHLORIDE SOLUTION SAFE TO 30° BELOW ZERO			CALCIUM CHLORIDE SOLUTION SAFE TO 40° BELOW ZERO		
	To Fill Tire 1/4 Full of Water		Use this Amount Calcium Chloride	Use this Amount of Water	Total Weight in Tire	Use this Amount Calcium Chloride	Use this Amount of Water	Total Weight in Tire
	Lbs.	Gals.	Lbs.	Gals.	Lbs.	Lbs.	Gals.	Lbs.
7.50-36	150	18.0	34.2	16.5	171	54.3	15.3	182
9.00-36	210	25.4	47.9	23.1	239	76.0	21.4	254



Best internet source
of information and help
for old Ford tractors.

www.ntractorclub.com