


WATCH YOUR PROOF-METER

EVERY
10 HOURS

Lubricate all fittings
Check air cleaner
Check engine oil

EVERY
100 HOURS

Change engine oil
Check oil level in steering housing

EVERY
300 HOURS

Oil rear generator bearing.

EVERY
400 HOURS

Change oil filter

EVERY
400 HOURS

OR MORE OFTEN
Lubricate wheel bearings
Remove and clean air cleaner assembly
Change transmission and hydraulic oil

**CALL YOUR DEALER FOR SERVICE.....USE ONLY
GENUINE FORD TRACTORS PARTS**




'48-'54

8N 4117
'39-'53



9N 66744
'39-'53

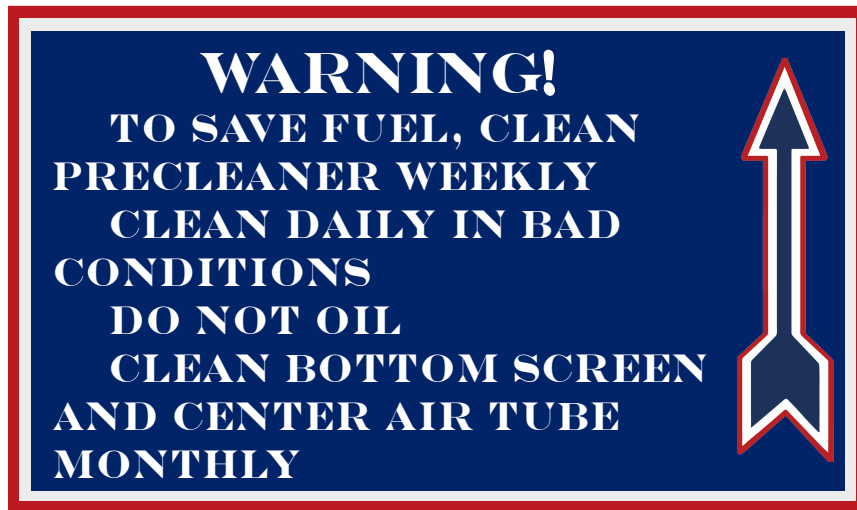

9N 10737
'39-'47

For Non-Commercial Use by Ntractorclub.com Members Only



9N 66745
'39-'47



9N 66744
'39-'52




9N 9638 '48-'53



8N 661-A '48-'53



Distributor
Decal

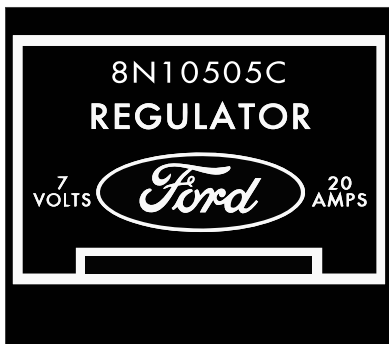

9N 66745
'48-'52

9N-9638-B
'48-'54

9N-9638-A
'48-'54



Part #112221

DEARBORN



DEARBORN



Part #104881

For Non-Commercial Use by Ntractorclub.com Members Only

www.ntractorclub.com

Firestone



Firestone



Firestone





For Non-Commercial Use by Ntractorclub.com Members Only

www.ntractorclub.com

SERVICE  DAILY

MORE FREQUENTLY UNDER SEVERE DUST CONDITIONS
**CLEAN AND REFILL OIL CUP TO OIL LEVEL BEAD WITH
 RECOMMENDED SEASONAL GRADE OR ENGINE CRANK-
 CASE OIL. INSPECT AND CLEAN LOWER SCREEN
 AND CENTER TUBE WHEN OIL CUP IS SERVICED.**

SEE OPERATORS MANUAL FOR ADDITIONAL INFORMATION
 MFD. BY **DONALDSON COMPANY, INC.** ST. PAUL, MINN
 MADE IN U.S.A. PRINTED IN U.S.A.

 OIL  LEVEL 

WARNING!

**SERVICE DAILY
 VERY DUSTY CONDITIONS TWICE DAILY
 USE S.A.E. 30 IN SUMMER
 USE S.A.E. 20 IN WINTER BELOW 40°F
 USE S.A.E. 10 IN BELOW FREEZING
 AIR CLEANER SCREENS MUST BE KEPT
 CLEAN AND FREE FROM OIL**

9N 9638 '39-'47

CYCLONE AIR CLEANER INSTRUCTIONS

Before installing Cyclone all air intake pipes to oil bath or other primary air cleaners should be thoroughly cleaned out. Cyclone must be firmly mounted with all connections AIR TIGHT.

Glass jar dust trap must at all times have good rubber ring and be firmly tightened in place, any air leak around top of jar or rubber will cause loss of vacuum and prevent cleaner from working.

When jar is about half full of dust, it should be removed, emptied and **TRACTOR AIR CLEANER CLEANED AND SERVICED PER MANUAL INSTRUCTIONS.**

This jar should never be removed while tractor engine is running.

Manufactured under one or more of the following U.S. Letters Patent No. 2134998 No. 2299332

AIR CLEANER SERVICE CO. DENVER, COLORADO

Ford

8N Hood Decals

Ford

For Non-Commercial Use by Ntractorclub.com Members Only



For Non-Commercial Use by Ntractorclub.com Members Only