

WARNING!

SERVICE DAILY

VERY DUSTY CONDITIONS-TWICE DAILY

USE S.A.E. 30 OIL - ABOVE 40° F.

USE S.A.E. 10W OIL - BELOW 40° F.

AIR INLET SCREEN MUST BE KEPT
CLEAN AND FREE FROM OIL.
CLEAN FILTER ELEMENT AND BODY
MONTHLY WITH SOLVENT.
KEEP HOSE CONNECTIONS TIGHT.
USE OF ADDITIONAL CLEANERS
NOT RECOMMENDED.



**BE
CAREFUL**

PULL ONLY
FROM STANDARD
DRAWBAR OR
DRAWBAR CLEVIS
DO NOT HITCH
TO AXLE OR ANY
POINT ABOVE

WARNING!

USE FORD MOTOR CO.

VENTED CAP

PART NO. NAA-9030-D

ONLY

ON THIS FUEL TANK



BE CAREFUL

PULL ONLY FROM STANDARD
DRAWBAR OR DRAWBAR CLEVIS
DO NOT HITCH TO AXLE OR
ANY POINT ABOVE

BE CAREFUL

**PULL ONLY FROM STANDARD
DRAWBAR OR DRAWBAR CLEVIS
DO NOT HITCH TO AXLE OR
ANY POINT ABOVE**

BE CAREFUL

KEEP ALL SAFETY SHIELDS IN PLACE.

**DISENGAGE PTO AND SHUT OFF ENGINE BEFORE SERVICING
TRACTOR OR PTO DRIVEN IMPLEMENTS.**

**KEEP HANDS, FEET AND CLOTHING AWAY FROM ALL MOVING
PARTS.**

**DO NOT PERMIT ANYONE TO RIDE ON TRACTOR OR IMPLEMENT
EXCEPT THOSE REQUIRED FOR ITS OPERATION.**

**ALWAYS USE PROPER WARNING DEVICES FOR HIGHWAY
OPERATION.**

TRACTOR OPERATION AND MAINTENANCE

**REFER TO OWNERS MANUAL FOR COMPLETE OPERATION AND
MAINTENANCE INSTRUCTIONS.**

MADE IN U S A

Ford

REG US PAT OFFICE
MARCA REGISTRADA




WATCH YOUR PROOF-METER

- EVERY**
10 Hours Lubricate All Fittings. Check Air Cleaner.
Check Engine Oil.
- EVERY**
100 Hours Change Engine Oil. Check Oil Level in Steering
Housing, Hydraulic System, Transmission,
and Rear Axle.
- EVERY**
200 Hours Change Oil Filter. Oil Rear Generator Bearing.
Lubricate Distributor Cam.
- EVERY**
600 Hours Repack Front Wheel Bearings High Grade Short Fibre
OR MORE Grease. Remove and Clean Air Cleaner Assembly.
OFTEN Change Oil in Transmission, Rear Axle and Hydraul-
ic System.


FOLLOW SEASONAL REQUIREMENTS BELOW:

- Engine Oil WINTER (Below 32° F.) SUMMER (Above 32° F.)
SAE10W or 20W SAE 20 or 30
- Hydraulic System . (Below 10° F.) (Above 10° F.)
Mix 7 Qts. M-4864-A M-4864-A 9 Qts.
with 2 Qts. M-4864-D
- Transmission Use Mild Extreme Pressure Lubricant SAE 80
and Rear Axle Both Summer and Winter

**CALL YOUR FORD TRACTOR DEALER FOR SERVICE
USE ONLY GENUINE FORD TRACTOR PARTS . . .**

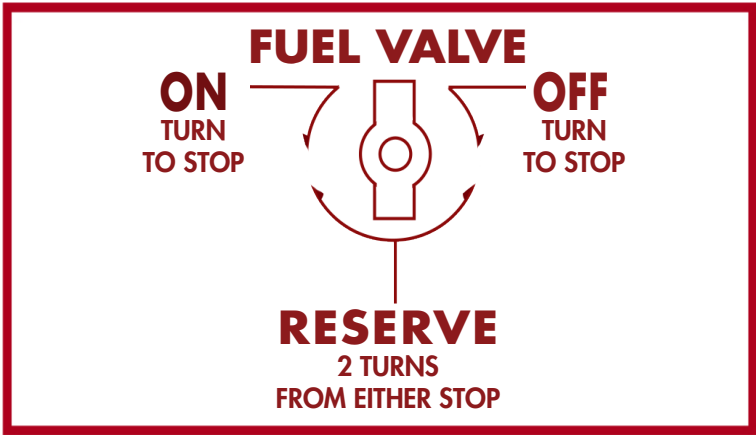

FOR STANDARD
SETTING ADJUST
SLEEVE TO
GROOVES AS
SHOWN

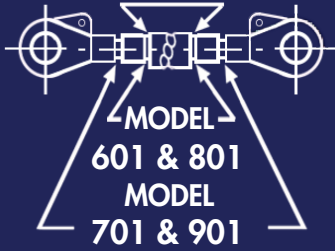

THIS TRACTOR
IS CONSTRUCTED UNDER
UNITED STATES
LETTERS PATENT

1,871,545	2,092,283
1,873,569	2,191,917
1,908,798	2,201,405
1,963,657	2,279,671
1,975,837	2,326,113
2,035,392	2,365,925
2,035,393	2,365,926
2,035,394	

OTHER PATENTS PENDING

MADE IN U.S.A. BY

Ford

REG U.S. PAT.OFF.



BATTERY
FILL WITH CLEAN
WATER EVERY 3 DAYS

WARNING!

TO SAVE FUEL, SERVICE
PRECLEANER DAILY. DO NOT OIL.

CLEAN BOTTOM SCREEN AND
CENTER AIR TUBE.

KEEP HOSE CONNECTIONS TIGHT.

